

Product Data Sheet

WF-7742 VOC-Free Wave Solder Flux

Features

- Excellent Surface Wetting
- Eliminates Cleaning
- Wide Process Window
- Use with Pb-Free and Sn/Pb Assembly Processes

Introduction

WF-7742 is a VOC-free, no-clean flux specifically developed for Pb-free wave soldering of surface-mount, mixed-technology and through-hole electronics assemblies.

WF-7742 is a water-based, nonflammable formulation dramatically reducing VOC emissions and eliminating special storage requirements. A wide process window provides excellent solderability on difficult to solder assemblies and reduces solder balling.

Cleaning

WF-7742 is designed for no-clean applications. However, the flux can be removed if necessary by using a commercially available flux remover.

Physical Properties

Test	Result
Color:	Clear
Specific Gravity: @25°C (77°F)	1.014
@15.5°C (60°F)	1.014
Acid Value	36
Solids Content	5.76
Flash Point	None
J-STD-004 Flux Type	ORLO

All information is for reference only. Not to be used as incoming product specifications.

Packaging

- 5 gallon containers
- 55 gallon drums

IPC Surface Insulation Resistance

Test Pattern	Board	24 Hours	96 Hours	168 Hours
IPC B24	Control	2.95×10^{13}	2.08×10^{13}	1.56×10^{13}
	Pattern up	8.93×10^9	9.10×10^9	6.28×10^9
	Pattern down	1.32×10^9	2.71×10^9	3.19×10^9

All readings expressed in ohms

IPC ECM/Telcordia EM Resistance Test

Test Pattern	Board	96 Hours	596 Hours
IPC B25A	Control	9.97×10^{10}	9.03×10^{10}
	Pattern up	3.88×10^{10}	1.16×10^{11}
	Pattern down	5.23×10^9	3.62×10^{11}

All readings expressed in ohms

Telcordia GR-78 Surface Insulation Resistance Test

Test Pattern	Board	Initial Reading	Final Reading
IPC B25A	Control	8.69×10^{12}	1.40×10^{13}
	Pattern up	3.20×10^{11}	7.02×10^{11}
	Pattern down	6.75×10^{11}	4.72×10^{11}

All readings expressed in ohms

Technical Support

Indium Corporation's internationally experienced engineers provide in-depth technical assistance to our customers. Thoroughly knowledgeable in all facets of Material Science as it applies to the electronics and semiconductor sectors, Technical Support Engineers provide expert advice in solder properties, alloy compatibility and selection of solder preforms, wire, ribbon and paste. Indium Corporation's Technical Support engineers provide Rapid Response to all technical inquiries.

Material Safety Data Sheet

The MSDS for this product can be found online at <http://www.indium.com/techlibrary/msds.php>

OVER→

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago: +1 315 853 4900



©2008 Indium Corporation

Form No. 97862 (A4) R6

ISO 9001
REGISTERED

WF-7742 VOC-Free Wave Solder Flux

Process Recommendations


WF-7742 should be applied by ultrasonic spray for best results. Topside board temperatures can range from 110°-135°C depending on equipment capability and assembly requirements. Contact with the solder wave can be as long as 5 seconds. Preheat temperature should be adjusted to ensure complete water removal before contact with the solder wave.

A thin uniform flux deposition of 1,000-1,500 micrograms per square inch of flux solids should be applied as a starting point.

Because WF-7742 is water-based, it does not require frequent acid value monitoring. If thinning is required, deionized should be used.

WF-7742 may freeze if exposed to temperatures below 0°C (32°F). If the flux becomes frozen, bring to room temperature until thawed and agitate. The material is not affected by freezing.

WF-7742 Recommended Profile for Pb-Free Wave Soldering

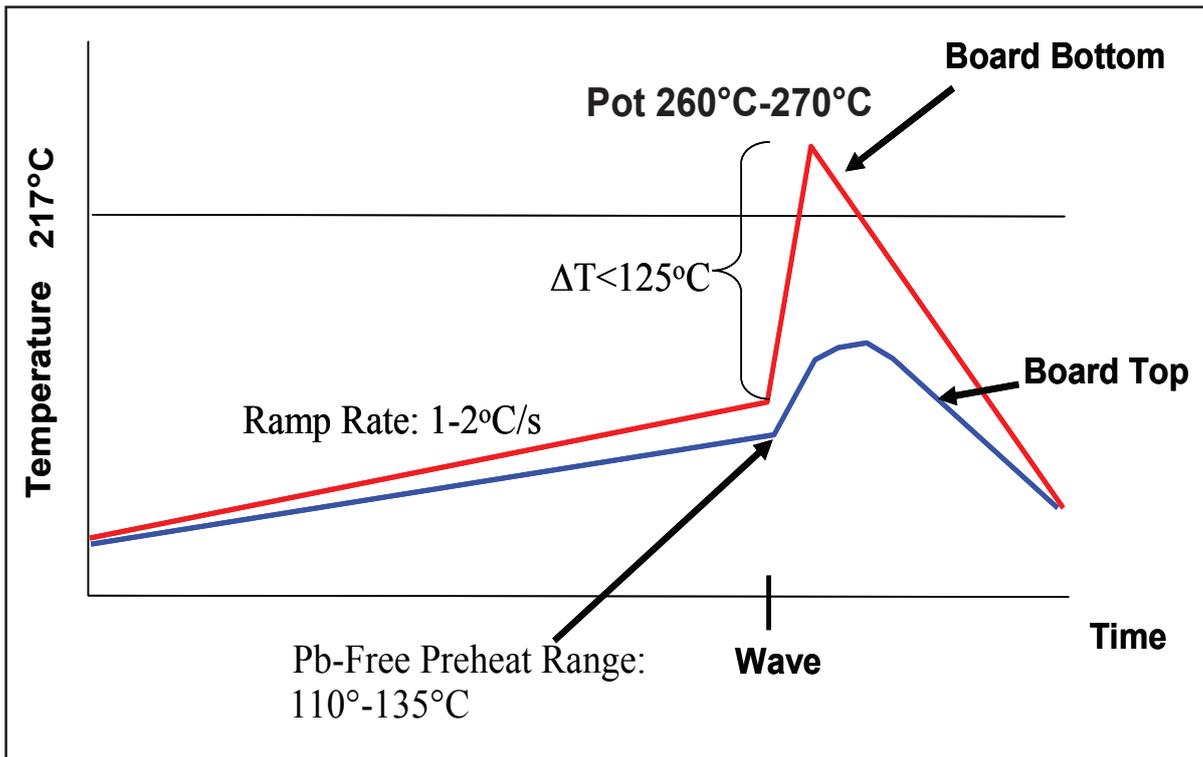

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices.

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago: +1 315 853 4900



©2008 Indium Corporation

ISO 9001
REGISTERED