

PRODUCT DATA SHEET



Indium Sulfide

In₂S₃

Introduction

Indium sulfide (In₂S₃) is an orange-red to red colored chemical with a sulfur odor characteristic of all sulfides. It is insoluble in water and most organic solvents, but decomposes in common mineral acids, releasing hydrogen sulfide gas.

Indium sulfide is used primarily as a buffer layer in copper-indium-diselenide (CIGS) photovoltaic solar cells, replacing toxic cadmium sulfide. It functions as an n-type semiconductor with an optical band gap of 2.1-2.2 eV. The indium sulfide buffer layer can be deposited using vacuum chemical vapor deposition or DC magnetron sputtering. Indium sulfide is available in 99.99% or 99.999% purities as a powder or compressed pellets.

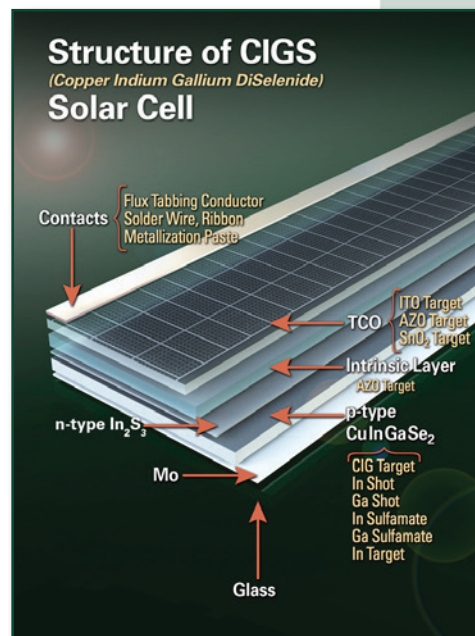

Properties

Chemical Formula	In ₂ S ₃
Molecular Weight	325.82
General Description	Orange-red powder with sulfide odor
Uses	Replacement of toxic CdS buffer layer in the manufacture of CIGS thin film solar cells
Purity Grades Available	4N (99.99%), 5N (99.999%)
Solubility	Insoluble in cold water; soluble in mineral acids
Specific Gravity	4.90 g/cc
Melting Point	1050°C
Boiling Point	Sublimes at 850°C in high vacuum
Theoretical Indium Percentage	70.48
Minimum Indium Percentage	65
Nominal Indium Percentage	68 +/- 3.0

Standard Packaging

Quantity*	Container
3.5 kg	1 gallon Nalgene
2.0 kg	1/2 gallon Nalgene
1.0 kg	1 liter Nalgene
500 g	1/2 liter Nalgene
100–200 g	Plastic Jars

*All package sizes contain suitable dessicant. Packaging in other sizes or in glass may be available upon request.

Storage and Shelf Life

Indium sulfide should be kept in a tightly sealed container in a dry, cool place away from mineral acids. The shelf life is 6 months for unopened containers.

Safety Data Sheets

The SDS for this product can be found online at <http://www.indium.com/sds>

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

Form No. 97553 (A4) R7

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago, Rome: +1 315 853 4900



ISO 9001
REGISTERED