

PRODUCT DATA SHEET

Indium7.08 BiAgX[®]

High-Temperature Pb-Free Dispensing Solder Paste


Introduction

BiAgX[®] is a true solder paste technology. It reflows, solders, wets, and solidifies, just like any other solder paste. When converting from a standard high-Pb solder paste-based process, minimal process adjustments are required, eliminating the need for new capital expenditure.

Solder joints made with **BiAgX[®]** will work well even in high-temperature environments in excess of 150°C, with minimal degradation of the final joint mechanical structure and little or no deterioration in electrical and thermal performance. It contains no costly specialty materials, such as nanoparticles or gold.

BiAgX[®] is suited to smaller die and lower voltage applications, such as those used in QFN packages for portable, automotive, and industrial electronics. **BiAgX[®]** is available in both dispense (**Indium7.08**) and printing (**Indium7.16**) solder pastes.

BiAgX[®] is evolving into a family of products, all based around a platform technology and is a patent-pending and trademarked product of Indium Corporation.

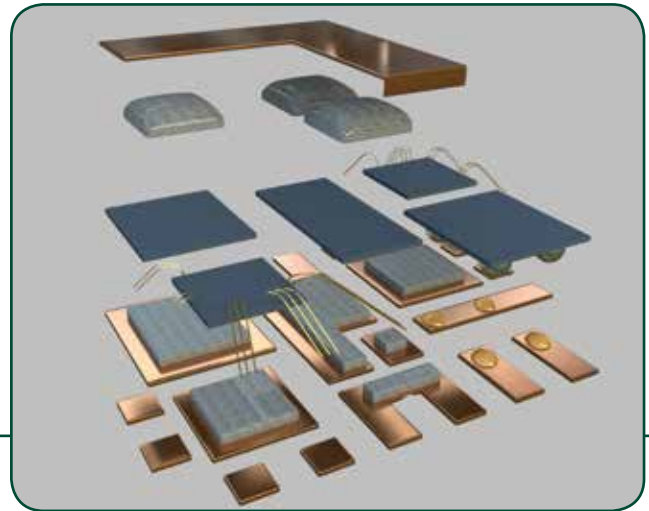

Features

- Drop-in replacement for high Pb-containing solder paste
- Pb-free (lead-free) and Sb-free (antimony-free)
- Flux cleanable with standard cleaning chemistries and processes
- Requires no pressure on the die during reflow
- No costly specialty materials

Although other products are currently under development, such as higher temperature versions, the current BiAgX[®] offering is either **Low Ag** (silver) or **High Ag**. The **Low Ag** is the standard and lower cost material. Although the **High Ag** material may show slightly higher voiding than the standard **Low Ag** BiAgX[®], it has shown applicability in certain niche applications.

Solder Paste Description	Status	Application	General Use	Solidus (Final Joint)
Low Ag BiAgX [®] Indium7.XX	Released product	Standard die-attach material	High-Pb solder replacement	262°C
High Ag BiAgX [®] Indium7.XX	Released product	Standard die-attach material; some SMT uses	High-Pb solder replacement with higher bond strength than low Ag; very thin Sn (<5 microns) coatings on components	262°C

IPC Tests & Results

Test	Result	Test	Result
J-STD-004 (IPC-TM-650)		J-STD-005 (IPC-TM-650)	
Flux Type (per J-STD-004A)	ROH0	Typical Solder Paste Viscosity (Type 4, 88%) Malcom (5min/10rpm)	460 poise
Presence of Halide	0%	Wetting Test	Pass
Fluoride Spot Test	Pass	Solder Ball Test	Pass
Post Reflow Flux Residue	<1.5% of solder paste	Tack (typical)	55 grams
SIR	Pass (after cleaning)		
Acid Value	105 (flux)		

All information is for reference only. Not to be used as incoming product specifications.

From One Engineer To Another[®]



PRODUCT DATA SHEET

Indium7.08 BiAgX[®] Dispensing Solder Paste

Alloys

Indium Corporation manufactures low-oxide spherical powder in standard Type 4 and Type 5 mesh size. Other sizes are available upon request.

Standard Dispensing Powder Specifications

Metal Content		Particle Size	
Type 4	Type 5	Type 4	Type 5
88%	87%	25 to 38µm	20 to 25µm

Packaging

Packaging is usually in 30cc syringes, but other syringe options are available upon request. Airless (bubble-free) packaging is standard for syringe dispense.

Storage and Handling Procedures

Refrigerated storage will prolong the shelf life of solder paste. The shelf life of **Indium7.08 BiAgX[®]** is 6 months at storage temperatures of <10°C. Solder paste contained in syringes should be stored tip down. Solder paste should be allowed to reach ambient working temperature prior to use. No heating should be employed.

Generally, paste should be removed from refrigeration at least 4 hours before use. Actual time to reach thermal equilibrium will vary. Paste temperature should be verified before use.

Cleaning

Indium7.08 BiAgX[®] is designed to be cleaned using standard cleaning chemistries. Indium Corporation's Technical Support Engineers can recommend appropriate cleaning materials from leading suppliers that are suitable for the application.

Dispensing

Indium7.08 BiAgX[®] at 88%w/w metal loading for Type 4 and 87% for Type 5 powders is designed for general dispense purposes. The appropriate dispense parameters will depend on the required solder paste dot size, dispense frequency and needle/dispense-nozzle design, as well as the dispense equipment type [time/pressure (TP) or auger]. As a general guideline, do not exceed (that is, do not use a higher gauge number) than 25 gauge for a Type 4. The critical parameter here is the inner diameter (ID) of the needle:


For TP dispense, begin with a pressure of 15psig (~100kPa) and a dispense time of 100ms. A pressure over 45psig (~300kPa) is considered excessive, and a lower needle gauge number may need to be selected (larger ID).

For auger dispense, begin with a slow auger rotation speed and large auger-casing distance, to minimize particle damage and allow more laminar flow of paste.

Needle Gauge	Needle ID		Approximate Smallest Dot Volume		
	inch	microns	inch ³	cm ³	mm ³
22	0.016	406	1.10E-06	1.8E-05	1.8E-02
23	0.013	330	5.70E-07	9.3E-06	9.3E-03
25	0.010	254	2.50E-07	4.1E-06	4.1E-03

Reflow

Recommended Profile:

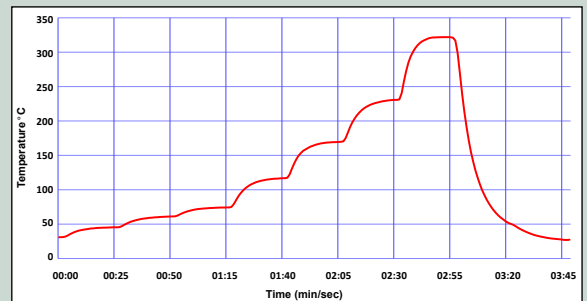

The profile above is designed for use with **BiAgX[®]** in a nitrogen atmosphere or forming gas (<100ppm O₂). It can serve as a general guideline for establishing a profile for your process and should be regarded as a typical example. Adjustments to this profile may be necessary based on assembly size, thermal density, and other factors.

Cooling Stage:

Cooling after the reflow spike should be as fast as practical. This is desired to form a fine-grained metallic structure.

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

Contact our engineers today: askus@indium.com

Learn more: www.indium.com

ASIA +65 6268 8678 • CHINA +86 (0) 512 628 34900 • EUROPE +44 (0) 1908 580400 • USA +1 315 853 4900



©2017 Indium Corporation