

PRODUCT DATA SHEET

Indium10.8HF Pb-Free Solder Paste



Introduction

Indium10.8HF is an air reflow, no-clean solder paste specifically formulated to accommodate the higher processing temperatures required by the SnAgCu, SnAg, and other alloy systems favored by the electronics industry to replace conventional Pb-bearing solders. **Indium10.8HF** offers unprecedented stencil print transfer efficiency to work in the broadest range of processes.

Alloys

Indium Corporation manufactures low-oxide spherical powder composed of a variety of Pb-free alloys that cover a broad range of melting temperatures. Type 3, Type 4, and Type 5 powders are standard offerings with Pb-free alloys. The metal percent is the weight percent of the solder powder in the solder paste and is dependent upon the powder type and application. Standard product offerings are detailed in the specifications table.

Standard Product Specifications

Alloy	Metal Load	
	Type 4/4.5	Type 5/T5-MC
95.5Sn/3.8Ag/0.7Cu (SAC387)	89%	88-88.5%
96.5Sn/3.0Ag/0.5Cu (SAC305)		
98.5Sn/1.0Ag/0.5Cu (SAC105)		
99Sn/0.3Ag/0.7Cu (SAC0307)		

Compatible Products

- Rework Flux: TACFlux® 020B, TACFlux® 089HF
- Cored Wire: CW-807
- Wave Flux: WF-9945, WF-9958

Features

- Excellent NWO performance
- Very wide reflow profile window under both air and nitrogen
- Excellent HIP performance
- Excellent soldering performance and process yield
 - Excellent wetting to all fresh and aged surface finishes, including, but not limited to:
 - OSP
 - Immersion Ag
 - Immersion Sn
 - ENIG
 - Low bridging, tombstoning, and solder beading
 - Low voiding in all joints including QFN and BGA assemblies
- Clear post reflow residue

Storage and Handling Procedures

Refrigerated storage will prolong the shelf life of solder paste. Solder paste packaged in cartridges should be stored tip down.

Storage Conditions (unopened containers)	Shelf Life
<10°C	6 months

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least two hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening.

Packaging

Indium10.8HF is currently available in 500g jars or 600g cartridges. Packaging for enclosed print head systems is also readily available. Alternate packaging options may be available upon request.

OVER→

J-STD TESTS & RESULTS

Test	Result	Test	Result
J-STD-004 (IPC-TM-650) <ul style="list-style-type: none"> • Flux Type (per J-STD-004A) • Elemental Analysis for Cl • Elemental Analysis for Br • Post Reflow Flux Residue (ICA Test) • SIR (Ohms) 	ROLO < .05% (ND) < .05% (ND) <5% of solder paste Pass (>10 ⁸ @ 85°C, 85% R.H.)	J-STD-005 (IPC-TM-650) <ul style="list-style-type: none"> • Solder Paste Viscosity (Type 4.5) Malcom (10 rpm) • Slump Test • Solder Ball Test • Typical Tackiness • Wetting Test 	1400 (typical) Pass Pass 50 grams (typical) Pass

All information is for reference only. Not to be used as incoming product specifications.

Form No. 99040 (A4) R6

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju, Malaysia: +65 6268 8678
 CHINA: Suzhou, Shenzhen: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago, Rome: +1 315 853 4900



ISO 9001
REGISTERED

Indium10.8HF Pb-Free Solder Paste

Printing

Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components – A 10–20% reduction of stencil aperture has significantly reduced or eliminated the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine pitch components – A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process dependent (5–15% is common).
- For optimum transfer efficiency and release of the solder paste from the stencil apertures, industry standard aperture and aspect ratios should be adhered to.

Printer Operation	
Solder Paste Bead Size	~20–25mm in diameter
Print Speed	25–150mm/second
Squeegee Pressure	0.018–0.027Kg/mm of blade length
Underside Stencil Wipe	Start at once per every 5 prints and decrease frequency until optimum value is reached
Squeegee Type/Angle	Metal with appropriate length / ~60 degrees
Separation Speed	5–20mm/second or per equipment manufacturer's specifications
Solder Paste Stencil Life	Up to 12 hours (at 30–60% RH and 22–28°C)


Cleaning

Indium10.8HF is designed for no-clean applications, however the flux can be removed if necessary by using a commercially available flux residue remover.

Stencil Cleaning is best performed using isopropyl alcohol (IPA) as a solvent. Most commercially available non-water-based stencil cleaners work well.

Reflow

Recommended Profile:

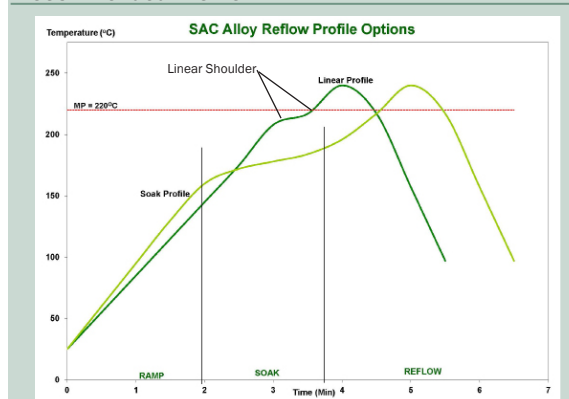

The stated profile recommendations apply to most Pb-free alloys in the SnAgCu (SAC) alloy system, including SAC305 (96.5Sn/3.0Ag/0.5Cu). This can be used as a general guideline in establishing a reflow profile when using **Indium10.8HF** solder paste. Deviations from these recommendations are acceptable, and may be necessary, based on specific process requirements, including board size, thickness, and density. Start with the linear profile, then move to the optional soak profile if needed. The flat soak portion of the linear profile (linear shoulder) may also be eliminated.

Note: All parameters are for reference only. Modifications may be required to fit process and design.

Reflow Profile Details	SAC305 Parameters		Comments
	Recommended	Acceptable	
Ramp Profile (Average Ambient to Peak) - Not the Same as Maximum Rising Slope	0.5–1°C/Second	0.5–2.5°C/Second	To minimize solder balling, beading, hot slump
Soak Zone Profile (optional)	30–90 Seconds	30–120 Seconds	May minimize BGA/CSP voiding Eliminating/reducing the soak zone <u>may</u> help to reduce HIP and graping
	160–180°C	150–200°C	
Time Above Liquidus (TAL)	45–60 Seconds	30–100 Seconds	Needed for good wetting/reliable solder joint As measured with thermocouple
Peak Temperature	230–260°C	230–262°C	
Cooling Ramp Rate	2–6°C/Second	0.5–6°C/Second	Rapid cooling promotes fine grain structure
Reflow Atmosphere	Air or N ₂		N ₂ preferred for small components

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju, Malaysia: +65 6268 8678
 CHINA: Suzhou, Shenzhen: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago, Rome: +1 315 853 4900



ISO 9001
REGISTERED