

PRODUCT DATA SHEET

# Indium8.9HF-1 Pb-Free Solder Paste



**Introduction**

**Indium8.9HF-1** is an air reflow, no-clean solder paste. **Indium8.9HF-1** offers unprecedented stencil print transfer efficiency to work in the broadest range of processes. In addition, the high probe testability of **Indium8.9HF-1** minimizes false failures in ICT.

**Alloys**

Indium Corporation manufactures low-oxide spherical powder composed of a variety of Pb-free alloys that cover a broad range of melting temperatures. This document covers Type 4 and Type 3 powder as standard offerings with SAC alloys. The metal percent is the weight percent of the solder powder in the solder paste and is dependent upon the powder type and application. Standard product offerings are detailed in the following table.

**Standard Product Specifications**

Alloy	Metal Load (Powder)
96.5Sn/3.0Ag/0.5Cu (SAC305)	88.00% (Type 5/Type 5-MC)
	88.25% (Type 4.5)
	88.25% (Type 4)
	88.50% (Type 3)

**Compatible Products**

- Rework Flux: TACFlux®089HF, TACFlux®020B
- Cored Wire: CW-807
- Wave Flux: WF-9945, WF-9958

Note: Other products may be applicable. Please consult one of Indium Corporation's Technical Support Engineers.

**Features**

- High oxidation barrier to eliminate graping and HIP defects
- Highly probe testable flux residue
- Halogen-free per EN14582 test method
- Excellent print transfer efficiency on 0.4mm pitch CSPs

**Storage and Handling Procedures**

Refrigerated storage will prolong the shelf life of solder paste. Solder paste packaged in cartridges should be stored tip down.

Storage Conditions (unopened containers)	Shelf Life
<10°C	6 months

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least two hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening. If needed, unopened containers can be stored for up to 7 days at <25°C.

**Packaging**

**Indium8.9HF-1** is currently available in 500g jars or 600g cartridges. Packaging for enclosed print head systems is also readily available. Alternate packaging options may be available upon request.

OVER→

**BELLCORE AND J-STD TESTS & RESULTS**

Test	Result	Test	Result
<b>J-STD-004 (IPC-TM-650)</b> • Flux Type Classification • EN14582 Halogen Content  • Corrosion • SIR (IPC-J-STD-004B) • SIR (IPC-J-STD-004A) • Electromigration (IPC-J-STD-004B) • Copper Mirror (JIS Z 3197)	ROLO <50ppm Br <sup>-</sup> <50ppm Cl <sup>-</sup> Pass Pass Pass Pass Pass	<b>J-STD-005 (IPC-TM-650)</b> • Malcom Solder Paste Viscosity (10 rpm) • Tack Strength • Solder Ball Test • Wetting Test • Slump Test  <b>JIS Z 3197</b> • Copper Mirror • Copper Plate Corrosion	1300 poise (typical) 40g (typical) Pass Pass Pass  Pass Pass

All information is for reference only. Not to be used as incoming product specifications.

Form No. 98523 (A4) R15

<p><a href="http://www.indium.com">www.indium.com</a></p> <p><a href="mailto:askus@indium.com">askus@indium.com</a></p> <p>ASIA: Singapore, Cheongju, Malaysia: +65 6268 8678                  CHINA: Suzhou, Shenzhen: +86 (0)512 628 34900                  EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400                  USA: Utica, Clinton, Chicago, Rome: +1 315 853 4900</p>		<p>ISO 9001 REGISTERED</p>
---	--	--------------------------------

## Indium8.9HF-1 Pb-Free Solder Paste

### Printing

#### Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components — A 10-20% reduction of stencil aperture has significantly reduced or eliminated the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine pitch components — A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process dependent (5-15% is common).
- For optimum transfer efficiency and release of the solder paste from the stencil apertures, industry standard aperture and aspect ratios should be adhered to.

Printer Operation	
Solder Paste Bead Size	~20-25mm in diameter
Print Speed	25-100mm/second
Squeegee Pressure	0.018-0.027Kg/mm of blade length
Underside Stencil Wipe	Start at once per every 5 prints and decrease frequency until optimum value is reached
Squeegee Type/Angle	Metal with appropriate length / ~60 degrees
Separation Speed	5-20mm/second or per equipment manufacturer's specifications
Solder Paste Stencil Life	>12 hours (at 30-60% RH and 22-28°C)


### Cleaning

**Indium8.9HF-1** is designed for no-clean applications, however the flux can be removed if necessary by using a commercially available flux residue remover.

**Stencil Cleaning** is best performed using isopropyl alcohol (IPA) as a solvent. Most commercially available non-water-based stencil cleaners work well.

### Reflow

#### Recommended Profile:

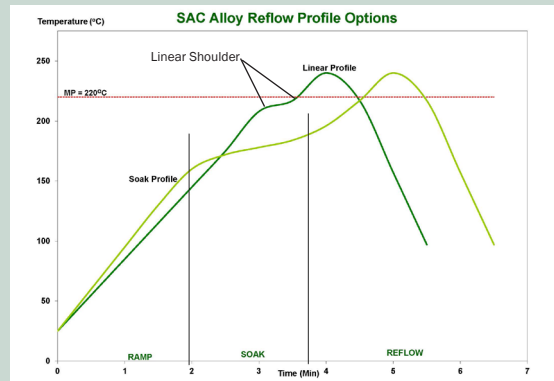

The stated profile recommendations apply to most Pb-free alloys in the SnAgCu (SAC) alloy system, including SAC305 (96.5Sn/3.0Ag/0.5Cu). This can be used as a general guideline in establishing a reflow profile when using **Indium8.9HF-1** solder paste. Deviations from these recommendations are acceptable, and may be necessary, based on specific process requirements, including board size, thickness, and density. Start with the linear profile, then move to the optional soak profile if needed. The flat soak portion of the linear profile (linear shoulder) may also be eliminated.

Note: All parameters are for reference only. Modifications may be required to fit process and design.

Reflow Profile Details	SAC305 Parameters		Comments
	Recommended	Acceptable	
Ramp Profile (Average Ambient to Peak) - Not the Same as Maximum Rising Slope	0.5-1°C/Second	0.5-2.5°C/Second	To minimize solder balling, beading, hot slump
Soak Zone Profile (Optional)	30-90 Seconds	30-120 Seconds	May minimize BGA/CSP voiding Eliminating/reducing the soak zone <u>may</u> help to reduce HIP and graping
	160-180°C	150-200°C	
Time Above Liquidus (TAL)	45-60 Seconds	30-100 Seconds	Needed for good wetting/reliable solder joint As measured with thermocouple
Peak Temperature	230-260°C	230-262°C	
Cooling Ramp Rate	2-6°C/Second	0.5-6°C/Second	Rapid cooling promotes fine grain structure
Reflow Atmosphere	Air or N <sub>2</sub>		N <sub>2</sub> preferred for small components

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

[www.indium.com](http://www.indium.com)

[askus@indium.com](mailto:askus@indium.com)

ASIA: Singapore, Cheongju, Malaysia: +65 6268 8678  
 CHINA: Suzhou, Shenzhen: +86 (0)512 628 34900  
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400  
 USA: Utica, Clinton, Chicago, Rome: +1 315 853 4900



ISO 9001  
REGISTERED