

PRODUCT DATA SHEET

Activated Flux-Cored Wire

for Non-Sensitive Electronics and Electrical Applications

Introduction

Indium Corporation has developed a range of flux-cored wire solutions to meet the needs of virtually every electrical and non-critical electronic assembly and rework operation. Flux-cored wire solutions are created when the desired alloy, cored wire flux, and flux percentage are combined into a void-free, perfectly layer-wound package, which can be easily used for both hand soldering and automated wire feed solder. Indium Corporation prides itself on providing the industry's widest range of flux-cored wire solders for both standard electronic assembly as well as highly specialized needs. No application is too large or too small.

Activated Cored Wire Flux Formulations

- CW-201 Standard Activated Rosin:** CW-201 is a traditional RA type flux as defined by the legacy Mil-Spec QQ-S-571. It uses traditional grade WW rosin and standard chloride activators. CW-201 is recommended for use with 63Sn/36Pb and 60Sn/40Pb alloys on non-sensitive oxidized copper parts, non-sensitive electrical/electronic assemblies where higher speed wetting is desired, assemblies where the residue is removed after soldering, and for soldering to moderately hard-to-solder metals such as brass and nickel.
- CW-207 Activated Rosin for Lead-Free:** CW-207 is similar to CW-201 except that it is formulated using a blend of heat stable clear rosins. It is the standard option for soldering with lead-free alloy cored wire when soldering non-sensitive electrical or electronic applications, or when soldering moderately difficult-to-solder metals such as brass or nickel.
- CW-209 Highly Activated Rosin:** CW-209 is exactly the same as CW-207 except with twice the amount of halogen activator. It is recommended for use where CW-207 or CW-201 are not active enough to solder to highly oxidized metals, or where speed of wetting is a high concern.

Formula	CW-201	CW-207	CW-209
IPC J-STD-004B	ROM1	ROM1	ROM1
Acid Value (mgKOH/gram of flux)	155	270	270
Rosin Containing	Yes	Yes	Yes
Halide Content %	0.33	0.29	0.58
Smoke	Medium	Medium	Medium
Odor	Mild, rosin	Mild, sweet	Mild, sweet
Color	Amber	Clear	Clear
IPC J-STD-006 Compliance	Indium Corporation impurity levels conform to or exceed IPC J-STD-006	Indium Corporation impurity levels conform to or exceed IPC J-STD-006	Indium Corporation impurity levels conform to or exceed IPC J-STD-006
Compatible Alloys	SnPb Alloys	Lead-Free Alloys	All common [†] and high-lead alloys ^{††}
Copper Mirror IPC J-STD-004B	Pass	Pass	Pass
Copper Corrosion IPC J-STD-004B	Pass	Pass	Pass
SIR J-STD-004B*	Pass	Pass	Pass
Electromigration J-STD-004B*	Pass	Pass	Pass

[†] Common Alloys: SAC305; SACm[®]0510; Sn995; SAC105; SAC0307; SAC387; 96.5Sn/3.5Ag; 95Sn/5Sb; Indalloy[®]227; Indalloy[®]254; 63Sn/37Pb; 60Sn/40Pb; 93.5Pb/5Sb/1.5Ag; 43Sn/43Pb/14B, and all similar alloys.

^{††} High-Temp Alloys: 5Sn/95Pb, 5Sn/93.5Pb/1.5Ag, 5Sn/92.5Pb/2.5Ag, 10Sn/88Pb/2Ag, and similar alloys.

* Data available upon request.

From One Engineer To Another[®]



Form No. 98848 R6


PRODUCT DATA SHEET

Activated Flux-Cored Wire

for Non-Sensitive Electronics and Electrical Applications


Copper Mirror

The J-STD-004B copper mirror test is performed per IPC-TM-650 method 2.3.32. To be classified as an “L” type flux, there should be no complete removal of the mirror surface. Activated flux-cored wire shows minor removal of the mirror surface, therefore, can be classified as an “M” type flux.

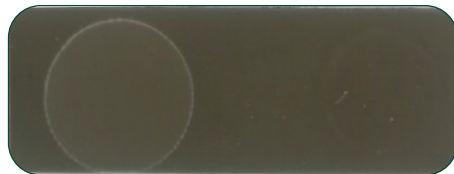

CW-201 10% Solution in IPA

Control

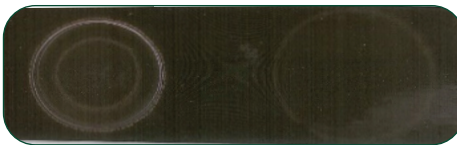

CW-207 10% Solution in IPA

Control




CW-209 10% Solution in IPA

Control


Copper Corrosion

Copper corrosion is tested per IPC-TM-650 method 2.6.15. This test gives an indication of any visible reactions that take place between the flux residue after soldering and copper surface finishes. With activated flux-cored wire, some of the residue darkens over time, but no corrosion is observed. With activated flux-cored wire, there is a minor amount of color change, acceptable for an “M” type flux.

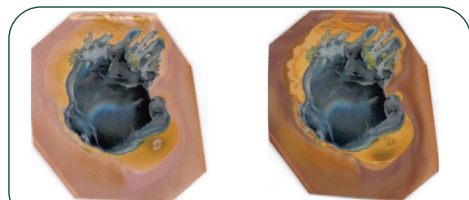


CW-201 Sn60/Pb40 0 hours

CW-201 Sn60/Pb40 240 hours

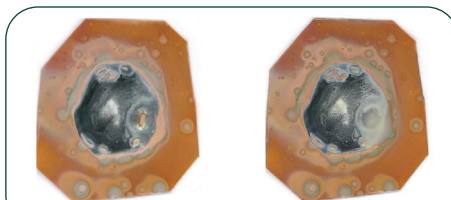

CW-207 SAC305 0 hours

CW-207 SAC305 240 hours

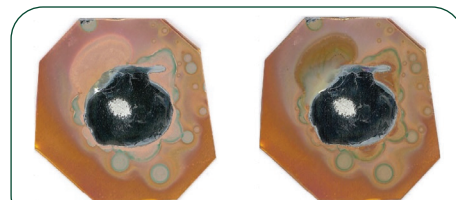

CW-209 SAC305 0 hours

CW-209 SAC305 240 hours

Standard Flux Core Sizes, Alloys, and Shelf Life

Alloys	High Flux %	Medium Flux %	Low Flux %	Very Low Flux %	Shelf Life (<26°C & <60% RH)
SnPb <80% Pb	2.7–3.2%	1.7–2.2%	0.8–1.2%	–	10 years from DOM
Pb-Free Alloys	3.3–3.7%	2.7–3.2%	1.7–2.2%	0.8–1.2%	10 years from DOM
High Lead >85%	1.7–2.2%	1.3–1.7%	0.8–1.2%	–	2 years from DOM

Indium Corporation can produce many of the alloys on its alloys list as cored wire. Alloys containing greater than 20% bismuth, greater than 8% antimony, gold, or greater than 5% silver cannot be produced as cored wire at this time.

Standard Diameters and Packaging

Diameters		Packaging	Cartons
Inches	mm		
0.010 ± 0.002	0.25 ± 0.05	¼lb (113g)	(10) ¼lb spools
0.015 ± 0.002	0.38 ± 0.05	¼lb (113g), 1lb (454g)	(10) 1lb spools
0.020 ± 0.002	0.51 ± 0.05	1lb (454g)	(10) 5lb spools
0.025 ± 0.002	0.64 ± 0.05	1lb (454g)	per box
0.032 ± 0.002	0.81 ± 0.05	1lb (454g)	—
0.040 ± 0.002	1.02 ± 0.05	1lb (454g), 5lb (2,268g)	—
0.062 ± 0.002	1.57 ± 0.05	1lb (454g), 5lb (2,268g), 20lb (9,072g)	(2) 20lb spools
0.120 ± 0.002	3.05 ± 0.05	1lb (454g), 5lb (2,268g), 20lb (9,072g)	per box

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.

Contact our engineers: askus@indium.com

Learn more: www.indium.com

ASIA +65 6268 8678 • CHINA +86 (0) 512 628 34900 • EUROPE +44 (0) 1908 580400 • USA +1 315 853 4900



©2021 Indium Corporation