

PRODUCT DATA SHEET


Indium Thermal Interface Materials (TIM)

Introduction

Thermal interface materials are useful for a variety of applications, but solder thermal interface materials (sTIM) are especially suited to high-end device cooling. To improve package reliability, it is especially important to choose the right alloy. Indium, in particular, should be considered as a sTIM because of its high thermal conductivity, compressibility (SMA-TIM), and ease of application.

Specifications

Max. Operational Temp.	125°C
Standard Purity Level	99.99%
Typical Size	25.4mm x 25.4mm x .05-.3mm (1" x 1" x .002"-.012")

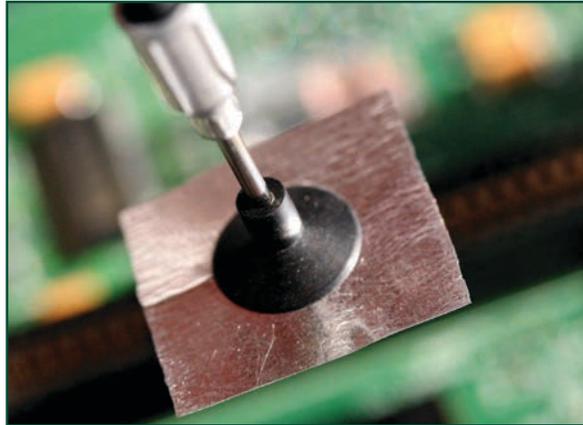

Applications

Indium preforms may be used in a variety of processes.

- Compressed Between Two Surfaces Without Reflow (SMA-TIM) Soft Metal Alloy-TIM**
 The extreme malleability of indium allows it to minimize surface resistance – thereby increasing heat flow.
- Soldered Between Two Surfaces (sTIM) Solder-TIM**
 Used to further improve thermal resistance, this application may require the use of a flux to reduce oxides on soldering surfaces.
- Cold-Welding**
 Another process that is used to create a thermal interface involves reflowing indium preforms onto each solderable surface. The indium-coated surfaces should be cleaned and pressed together to form a fluxless cold-weld solder joint. (see the application note: *Etching Indium to Remove Oxides.*)

Storage and Packaging

Solder preforms come in a variety of packaging options, including tape and reel. To minimize excessive handling, and exposure to air and subsequent oxidation, solder preforms should be packaged according to the quantity used during a typical work shift.

Store solder preforms in the original container, closed securely, in 55% RH or less and at or below normal room temperature (~70°F/21°C). Solder preforms can also be stored in an inert atmosphere, such as a nitrogen dry box.

Properties

Indalloy	#4
Electrical Conductivity (% of IACS) (1.72microhms-cm)	24
Thermal Conductivity (W/cm°C) (@ 85°C)	.86
Coefficient of Thermal Expansion (µin/µin per °C) (@20°C)	29
Density (lb/cu. in.)	.2641
Mass Density (gm/cm³)	7.31
Tensile Strength (PSI)	273
Shear Strength (PSI)	890
Young's Modulus (PSI X 10x6)	1.57
%Elongation	22 to 41
Brinell Hardness (2mm ball, 4kg load)	0.9
Latent Heat of Fusion (J/g)	28.47
Melting Point (°C)	156.7

All information is for reference only. Not to be used as incoming product specifications.

Safety Data Sheets

The SDS for this product can be found online at <http://www.indium.com/sds>

Application Notes on the use of Thermal Interface Materials can be found at <http://www.indium.com/technical-documents/application-notes> or email TIM@indium.com.

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

Form No. 98134 R3

www.indium.com

askus@indium.com

ASIA: Singapore, Cheongju, Malaysia: +65 6268 8678
 CHINA: Suzhou, Shenzhen: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago, Rome: +1 315 853 4900



©2016 Indium Corporation

ISO 9001
REGISTERED