

# PRODUCT DATA SHEET

# RMA-155

## Solder Paste

### Introduction

**RMA-155** is an air reflow, RMA solder paste formulated to accommodate a variety of alloys for electronics assembly. **RMA-155** has balanced performance to accommodate the widest variety of processes including: consistent stencil printing transfer, robust reflow window, and residue compatible with in-circuit testing.

### Features

- RMA paste for SnPb and Pb-free alloys
- Halogen-free per EN14582 test method
- High-performance stencil printing characteristics
- Eliminates hot and cold slump
- Robust reflow performance to accommodate assembly of BGA and components with large ground planes
- High oxidation resistance
- Clear, probe-testable post-reflow residues
- Maintains very high resistance during SIR testing
- Ideal for mixed alloy SnPb and Pb-free processes
- Available with SACm<sup>®</sup> for high-reliability Pb-free performance with low Ag content

### Alloys

Indium Corporation manufactures low-oxide spherical powder composed of a variety of Pb-free alloys that cover a broad range of melting temperatures. Types 4 and 3 powders are standard offerings with SAC alloys. The metal load is the weight percent of the solder powder in the solder paste and is dependent upon the powder type, alloy, and application.

### Bellcore and J-STD Tests and Results

Test	Result	Test	Result
<b>J-STD-004 (IPC-TM-650)</b>		<b>J-STD-005 (IPC-TM-650)</b>	
Flux Type (per J-STD-004A)	ROLO	Typical Solder Paste Viscosity Malcolm (10rpm)	1,700 poise
Flux-Induced Corrosion (Copper Mirror)	Type L	Slump Test	Pass
Presence of Halide Oxygen Bomb Followed by Ion Chromatography	<100ppm	Solder Ball Test	Pass
SIR	Pass	Typical Tackiness	35g
<b>QQ-S-571F</b>		Wetting Test	Pass
RMA Paste	Meets/Exceeds	<b>BELLCORE GR-78</b>	
Rosin Content	≥51% of non-volatile flux components	SIR	Pass
		Electromigration	Pass

*All information is for reference only.  
Not to be used as incoming product specifications.*

### Standard Product Specifications

Alloy	Powder Type	Printing Metal Load
SAC305	T3	89%
SAC305	T4	88.5%
Sn63Pb37	T3	90%
Sn63Pb37	T4	89.5%
SACm <sup>®</sup>	T4	88.5%
Sn3.5Ag	T3	89%

For more information about SACm<sup>®</sup>, visit [www.indium.com/SACm](http://www.indium.com/SACm)

### Packaging

**RMA-155** is currently available in 500g jars or 600g cartridges. Packaging for enclosed print head systems is also readily available. Alternate packaging options may be available upon request.

### Storage and Handling Procedures

Refrigerated storage will prolong the shelf life of solder paste. The shelf life of **RMA-155** is 6 months when stored at <10°C. Solder paste packaged in cartridges should be stored tip down.

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least 2 hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening.

### Technical Support

Indium Corporation's internationally experienced engineers provide in-depth technical assistance to our customers. Thoroughly knowledgeable in all facets of Material Science as it applies to the electronics and semiconductor sectors, Technical Support Engineers provide expert advice in solder preforms, wire, ribbon, and paste. Indium Corporation's Technical Support Engineers provide rapid response to all technical inquiries.

### Safety Data Sheets

Please refer to the SDS document within the product shipment, or contact our local team to receive a copy.




From One Engineer To Another<sup>®</sup>

PRODUCT DATA SHEET

# RMA-155 Solder Paste

## SAC Alloy Mixed Ramp Rate Reflow Profile Options

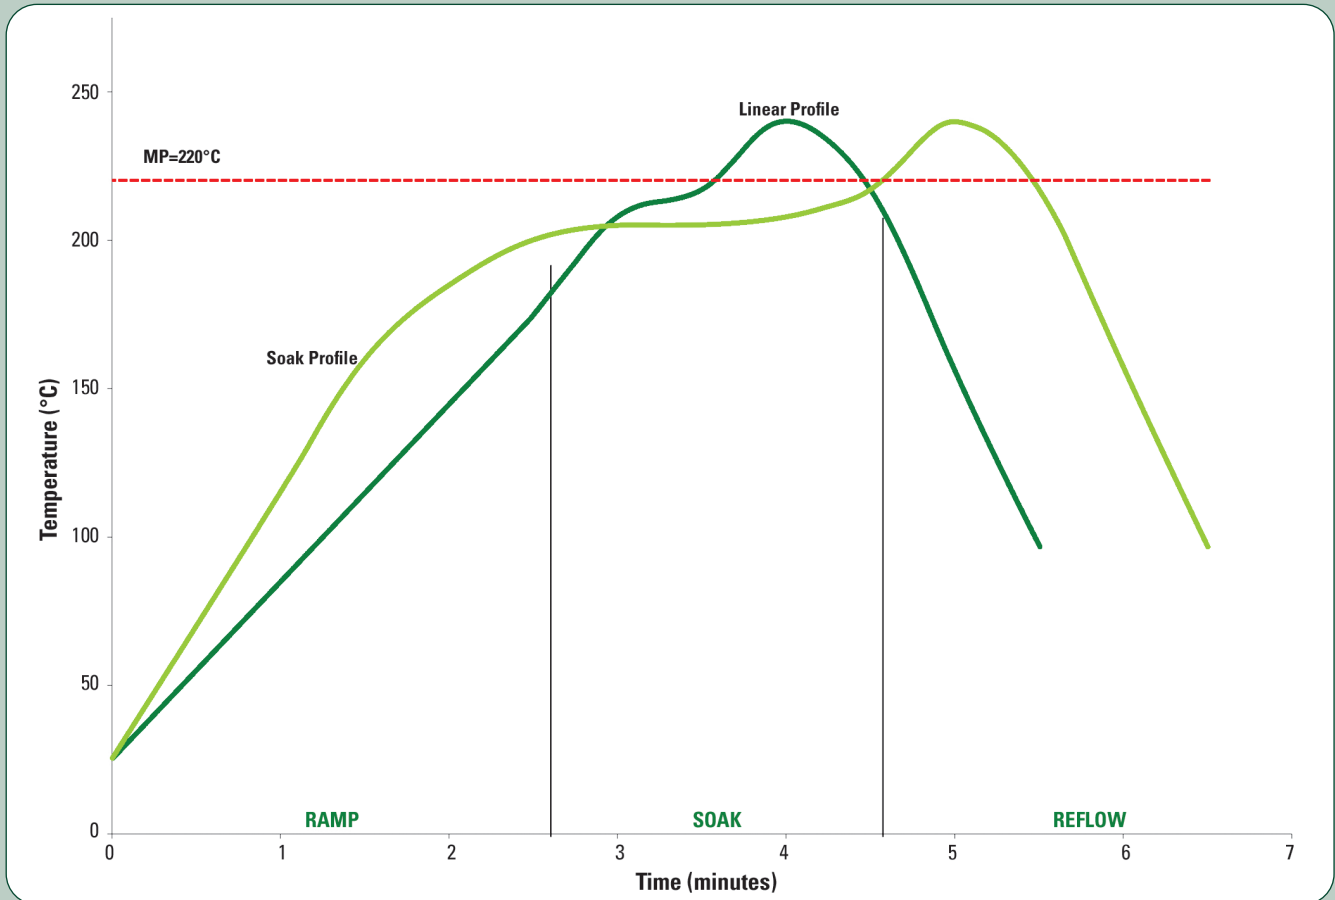

Start with the linear profile, then move to the optional soak profile, if needed.

Reflow Profile Details	SAC305 Parameters		Comments
	Recommended	Acceptable	
Ramp Profile (Average Ambient to Peak)— Not the Same as Maximum Rising Slope	1.0–1.5°C/second	0.5–2.5°C/second	To minimize solder balling, beading, hot slump
Soak Zone Profile (optional)	20–60 seconds	30–120 seconds	May minimize BGA/CSP voiding Eliminating/reducing the soak zone <u>may</u> help to reduce HIP and graping
	140–160°C	140–170°C	
Time Above Liquidus (TAL)	45–60 seconds	30–100 seconds	Needed for good wetting/reliable solder joint As measured with thermocouple
Peak Temperature	230–260°C	230–262°C	
Cooling Ramp Rate	2–6°C/second	0.5–6°C/second	Rapid cooling promotes fine-grain structure
Reflow Atmosphere	Air or N <sub>2</sub>		N <sub>2</sub> preferred for small components


All parameters are for reference only.  
Modifications may be required to fit process and design.



PRODUCT DATA SHEET

# RMA-155 Solder Paste

## SnPb Reflow Profile Options

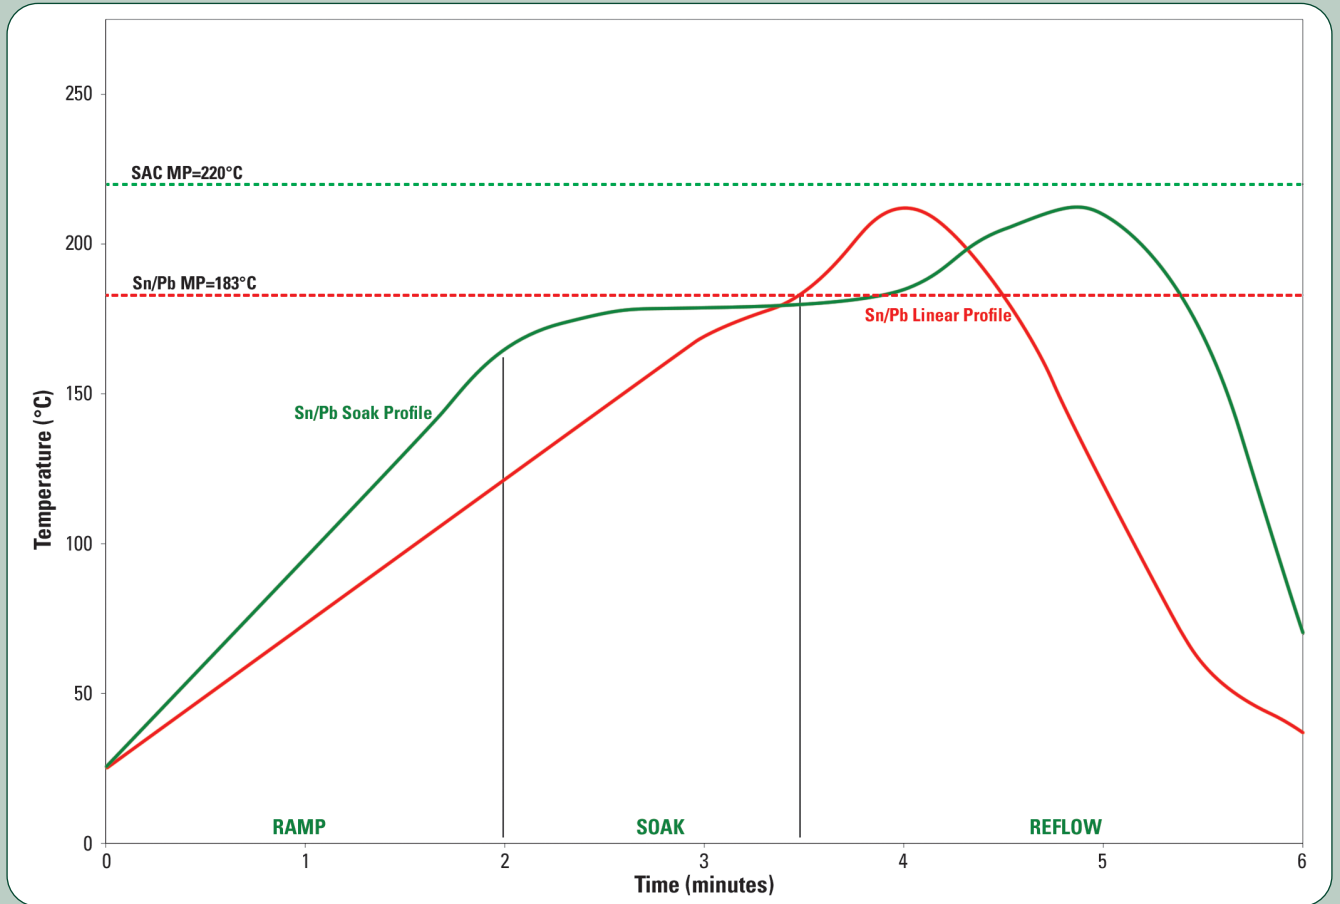

Start with the linear profile, then move to the optional soak profile, if needed.

Reflow Profile Details	SnPb		Comments
	Recommended	Acceptable	
Ramp Profile (Average Ambient to Peak)— Not the Same as Maximum Rising Slope	0.5–1°C/second	0.5–2.5°C/second	To minimize solder balling, beading, hot slump
Soak Zone Profile (Optional)	30–90 seconds	30–120 seconds	May minimize BGA/CSP voiding
	140–150°C	130–170°C	
Time Above Liquidus (TAL) Total Time and Temperature	45–60 seconds	30–100 seconds	Needed for good wetting/reliable solder joint
	198–213°C	195–233°C	
Cooling Ramp Rate	2–6°C/second	0.5–6°C/second	Rapid cooling promotes fine-grain structure
Peak Air Temperature	230°C		As measured with thermocouple
Reflow Atmosphere	Air or N <sub>2</sub>		N <sub>2</sub> typically preferred

All parameters are for reference only.  
Modifications may be required to fit process and design.



## PRODUCT DATA SHEET

# RMA-155 Solder Paste

## Printing

### Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components—A 10–20% reduction of stencil aperture has significantly reduced or eliminated the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine-pitch components—A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process-dependent (5–15% is common).
- For optimum transfer efficiency and release of the solder paste from the stencil apertures, industry standard aperture and aspect ratios should be adhered to.

## Printer Operation

Solder Paste Bead Size	20–25mm in diameter
Print Speed	25–200mm/second
Squeegee Pressure	0.018–0.027kg/mm of blade length
Underside Stencil Wipe	Start at once per every 5 prints and decrease frequency until optimum value is reached
Squeegee Type/Angle	Metal with appropriate length/~45 degrees
Separation Speed	5–20mm/second or per equipment manufacturer’s specifications
Solder Paste Stencil Life	Up to 12 hours (at 30–60% RH and 22–28°C)

## Cleaning

**RMA-155** is designed to be reliable without needing to be cleaned. However, the flux can be removed, if necessary, by using a commercially available flux residue remover (i.e., semi-aqueous, solvent based, or vapor degreaser).

Stencil cleaning is best performed using isopropyl alcohol (IPA) as a solvent. Most commercially available stencil cleaners also work well.

## Compatible Products

- **Rework Flux:** TACFlux® 020B, TACFlux® 089HF
- **Cored Wire:** CW-807
- **Wave Flux:** WF-7745, WF-9945

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.

Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)

ASIA +65 6268 8678 • CHINA +86 (0) 512 628 34900 • EUROPE +44 (0) 1908 580400 • USA +1 315 853 4900



©2022 Indium Corporation