

## PRODUCT DATA SHEET

# Durafuse<sup>®</sup> LT with Indium10.2HFA

## Low-Temperature Drop Shock Solution

### Introduction

**Durafuse<sup>®</sup> LT** is a patented novel solder paste mixed-alloy system for low-temperature reflow processes which require high drop shock reliability. **Durafuse<sup>®</sup> LT** is made up of a low-melting In-containing alloy and higher-melting SAC alloy. The SnInAg alloy initiates joint fusion while the SAC alloy provides enhanced strength and durability. **Durafuse<sup>®</sup> LT** is ideal for high-reliability applications, which utilize thermally sensitive components.

### Features

- Excellent drop shock reliability—comparable to SAC
- Reflow below 210°C
- Melting temperature above 180°C
- Good mechanical shear strength up to 150–165°C
- Good thermal and electrical conductivity

### Flux Vehicle

Indium10.2HFA is a halogen-free, no-clean solder paste. This paste has excellent wetting properties on all fresh and aged surface finishes including, but not limited to, OSP, ImAg, ImSn, and ENIG. Indium10.2HFA features clear pin-probable flux residues in addition to excellent HIP and NWO performance. Indium10.2HFA has a wide reflow profile window designed for typical Pb-free alloys and is compatible with recommended Durafuse<sup>®</sup> LT processes. Please contact Technical Support for assistance.

### Storage and Handling Procedures


Refrigerated storage will prolong the shelf life of solder paste. Solder paste packaged in syringes and cartridges should be stored tip down.

Packaging	Storage Conditions (unopened containers)	Preliminary Shelf Life
Syringe	<-10°C	6 months
Jar/Cartridge	<10°C	6 months

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least 2 hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening.

### Key Applications

Low-temperature solders reduce warpage of thermally sensitive components by reducing peak reflow temperature; however, standard Bi-based low-temperature alloys are unable to withstand even moderate drop shock. **Durafuse<sup>®</sup> LT** is a low-temperature Pb-free solder capable of reducing peak reflow temperature by 40°C relative to SAC305, with drop shock reliability two orders of magnitude greater than standard low-temperature alloys.

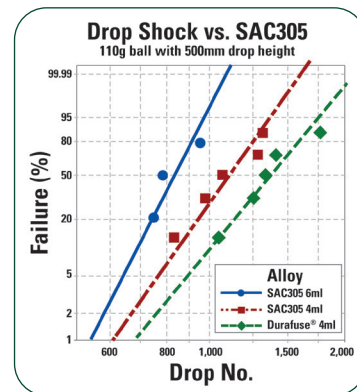

**Durafuse<sup>®</sup> LT** samples in the chart (left) experienced a peak reflow temperature of 210°C and demonstrated drop shock resilience similar to that of SAC305.

### Standard Product Specifications

Flux	Mesh Size	Printing Metal Load
Indium10.2HFA	Type 4	88–90%

Indium Corporation manufactures mixed low-oxide spherical powders in the industry standard Type 4 mesh size. Other non-standard mesh sizes are available upon request. The weight ratio of the flux/vehicle to the solder powder is referred to as the metal load and is typically in the range of 83–92% for standard compositions.

Indium10.2HFA Industry Standard Test Results and Classification			
Flux Type Classification	ROLO	Typical Solder Paste Viscosity for Type 4 Solder (Poise)	1,500
Based on the testing required by IPC J-STD-004B (IPC-TM-650)			
Halogen-free per IEC 61249-2-21, Test Method EN14582	<900ppm Cl <900ppm Br <1,500ppm Total	Conforms with all requirements from J-STD-005 (IPC-TM-650)	

From One Engineer To Another<sup>®</sup>



## PRODUCT DATA SHEET

# Durafuse® LT with Indium10.2HFA

## Low-Temperature Drop Shock Solution

### Printing

#### Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components—A 10–20% reduction of stencil aperture has significantly reduced or eliminated the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine-pitch components—A surface area reduction is recommended for apertures of 20mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process-dependent (5–15% is common).
- A minimum aspect ratio of 1:5 is suggested for adequate release of solder paste from stencil apertures. The aspect ratio is defined as the width of the aperture divided by the thickness of the stencil.

#### Printer Operation:

The following are general recommendations for stencil printer optimization. Adjustments may be necessary based on specific process requirements:

Solder Paste Bead Size	20–25mm in diameter
Print Speed	25–150mm/second
Squeegee Pressure	0.018–0.027kg/mm of blade length
Underside Stencil Wipe	Start at once per every 5 prints and decrease frequency until optimum value is reached
Solder Paste Stencil Life	Up to 12 hours at 30–60% RH and 22–28°C


### Cleaning

Indium10.2HFA is designed for no-clean applications; however, the flux can be removed, if necessary, by using a commercially available flux residue remover.

**Stencil Cleaning** is best performed using an automated stencil cleaning system for both stencil and misprint cleaning to prevent extraneous solder balls. Most commercially available stencil cleaning formulations including isopropyl alcohol (IPA) work well.

### Reflow

#### Recommended Profile:

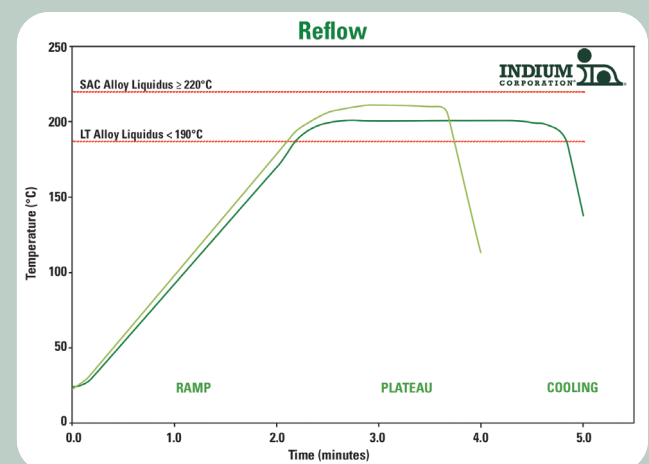

This profile is designed for use with **Durafuse® LT** (Indium10.2HFA). This can be used as a general guideline in establishing a reflow profile for **Durafuse® LT** Solder Paste. Deviations from these recommendations are acceptable, and may be necessary, based on specific process requirements.

### Packaging

Standard packaging for **Durafuse® LT** is 500g jars and 600g cartridges. Other packaging options may be available upon request.

### Complementary Products

- **Rework Flux:** TACFlux® 020B-RC
- **Liquid Rework Flux:** FP-500

*Note: Other products may be applicable. Please consult one of Indium Corporation's Technical Support Engineers.*

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices. All Indium Corporation's products and solutions are designed to be commercially available unless specifically stated otherwise.

All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.

Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)

ASIA +65 6268 8678 • CHINA +86 (0) 512 628 34900 • EUROPE +44 (0) 1908 580400 • USA +1 315 853 4900



©2023 Indium Corporation